

Accesorios para cables y cadenas:

Grillete derecho standard


Medidas aproximadas

Carga límite de trabajo tons	Diámetro (en pulgadas)		Dimensiones (en milímetros)	
	D	d	c	a
0.25	1/4	5/16	27	11
0.4	5/16	3/8	29	13
0.6	3/8	7/16	36	16
0.8	7/16	1/2	42	18
0.9	1/2	9/16	47	21
1.0	9/16	5/8	55	26
1.1	5/8	3/4	62	29
1.5	3/4	7/8	74	31
2.0	7/8	1	85	40
3.8	1	1 1/8	91	45
4.2	1 1/8	1 1/4	104	54
5.0	1 1/4	1 3/8	111	56
6.6	1 3/8	1 1/2	120	58
7.2	1 1/2	1 5/8	145	62
8.0	1 5/8	1 3/4	160	67
10.0	1 3/4	2	170	74
16.0	2	2 1/2	183	83

GRILLETES COMUNES FORJADOS (STD)

TERMINACIONES

Galvanizado, zincado o inoxidable
En algunas medidas disponemos de Grilletes DIN 82101

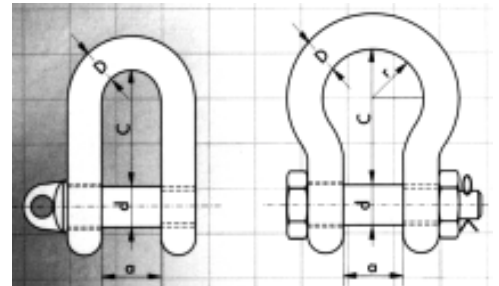

Carga límite de trabajo tons.	Ø Cuerpo	Ø Perno	Ancho a	Largo Interior		Ancho Cuerpo 2r	Peso aprox. x u.	
	D	d		Recto	Corazón		Perno c/tope	Perno rosc.
	mm.	mm.		mm.	mm.		kg.	kg.
0.33	5	6	9.5	19	22	16	0.02	
0.5	7	8	12	25	29	20	0.06	0.07
0.75	9	10	13.5	27	32	21	0.11	0.13
1	10	11	17	31	36.5	26	0.15	0.17
1.5	11	12	18.5	37	43	29	0.21	0.25
2	13.5	16	22	43	51	32	0.37	0.44
3.25	16	19	27	51	64	43	0.65	0.79
4.75	19	22	31	59	76	51	1.06	1.26
6.5	22	25	36	73	83	58	1.56	1.88
8.5	25	28	43	85	95	68	2.32	2.78
9.5	28	32	47	90	108	75	3.28	3.87
12	32	35	51	94	115	83	4.51	5.26
13.5	35	38	57	115	133	92	5.93	6.94
17	38	42	60	127	146	99	7.89	8.79
25	45	50	74	149	178	126	13.40	14.99
35	50	57	83	171	197	138	18.85	20.65
42.5	57	65	95	190	222	160	26.06	29.01
55	65	70	105	203	260	180	37.86	41.05
85	75	80	127	230	330	190	58.68	62.24
120	90	95	146	267	381	238		110

GRILLETES ALTA RESISTENCIA

FORJADOS SEGUN U.S.
Federal specifications
RR-C-271

Green Pin® VAN BEEST B

TERMINACIONES: Galvanizado



Grillete corazón con perno roscado en el cuerpo



Grillete recto con perno roscado en el cuerpo



Grillete corazón con perno de seguridad



Grillete recto con perno de seguridad